

.205" Series Nylon-insulated Female Terminal





Shenzhen Hongru Connector Co., Ltd

Email: yukyli@hrb-connector.com
 Tel: 86-0755 2709 6669
 Fax: 86-0755 2709 2392
 Skype: haiyuncheng-vivian
 Mobile(whatsapp): 86-186 8112 3590
 Website: http://www.hrb-connector.com

SPECIFICATIONS:

- Current Rating: AWG#22~#18: 10A AC,DC
 AWG#16~#14: 15A AC,DC
- Voltage Rating: 300V AC,DC
- Operating Temperature: -25℃~+105℃
- Material: Housing: Nylon66 UL 94V-2
 Terminal: Brass.Tin-plated
- Tab Size: 5.21x0.80mm Or 5.21x0.50mm
- The Insertion Force And Male Terminal: 7.8kg (max.)
- The withdrawal Force And Male Terminal: 3.0kg (Min.)
- Crimp tensile strength: AWG#22~#18: 5.0kg (Min.)
 AWG#16~#14: 10.0kg (Min.)
- cULus File No: E322751

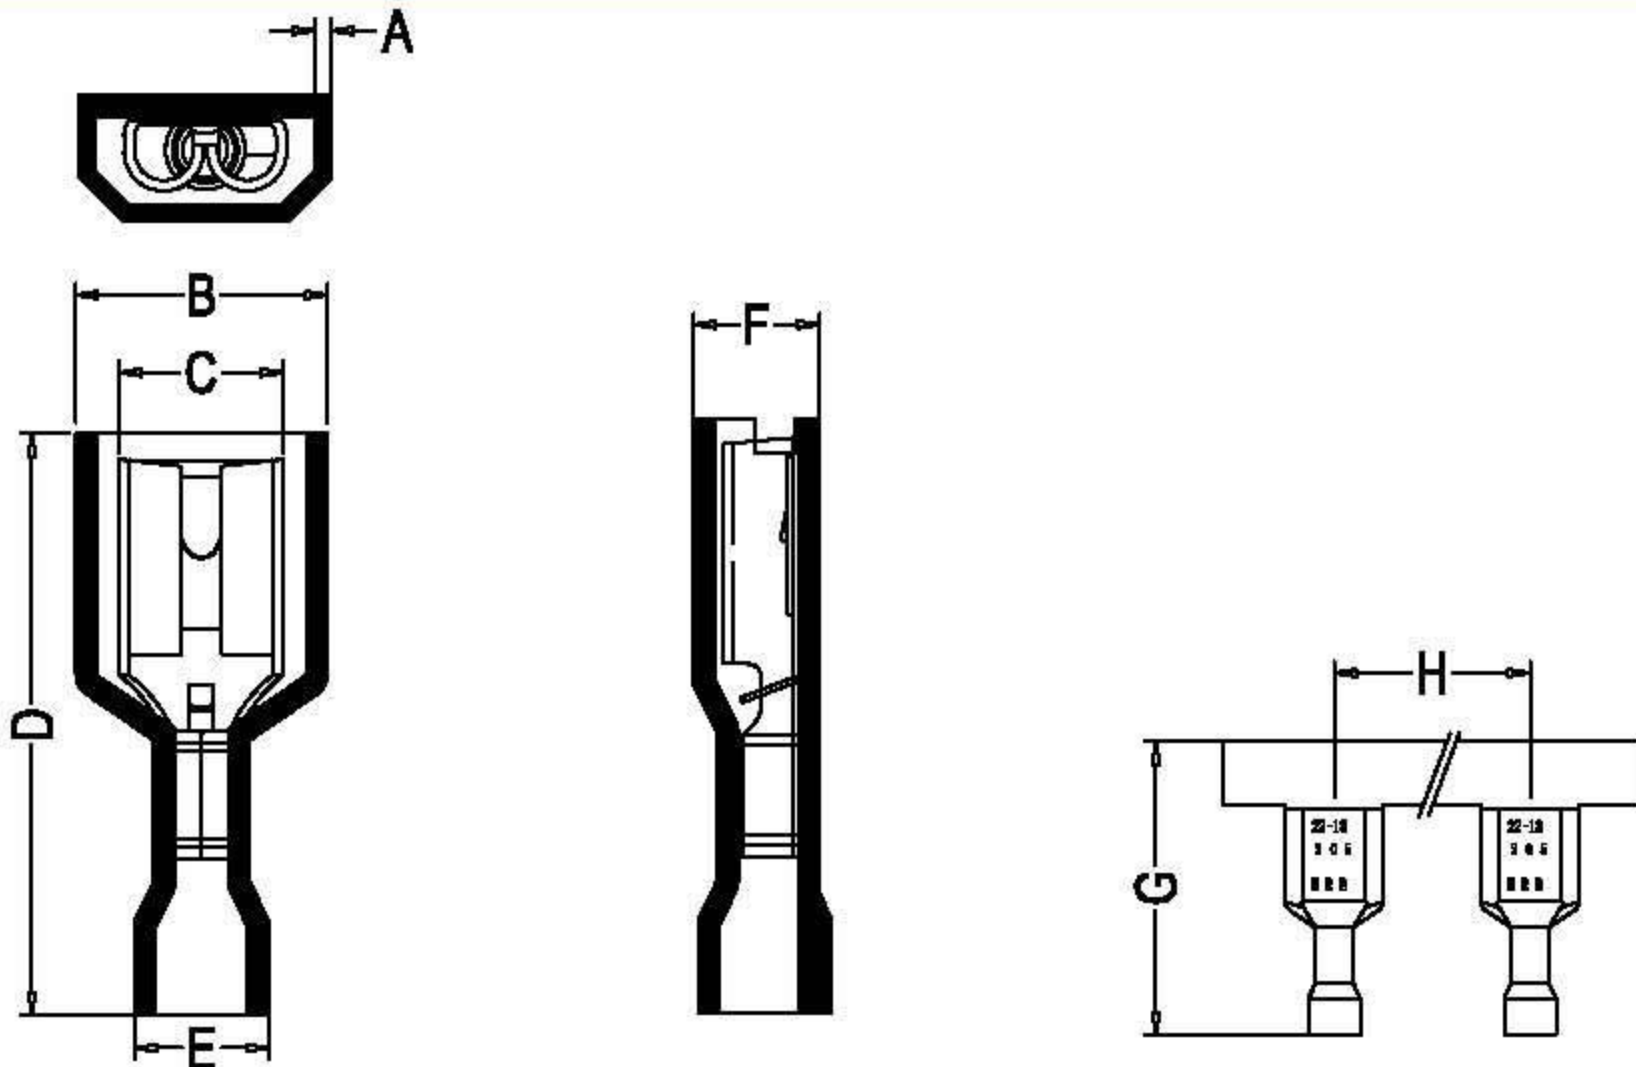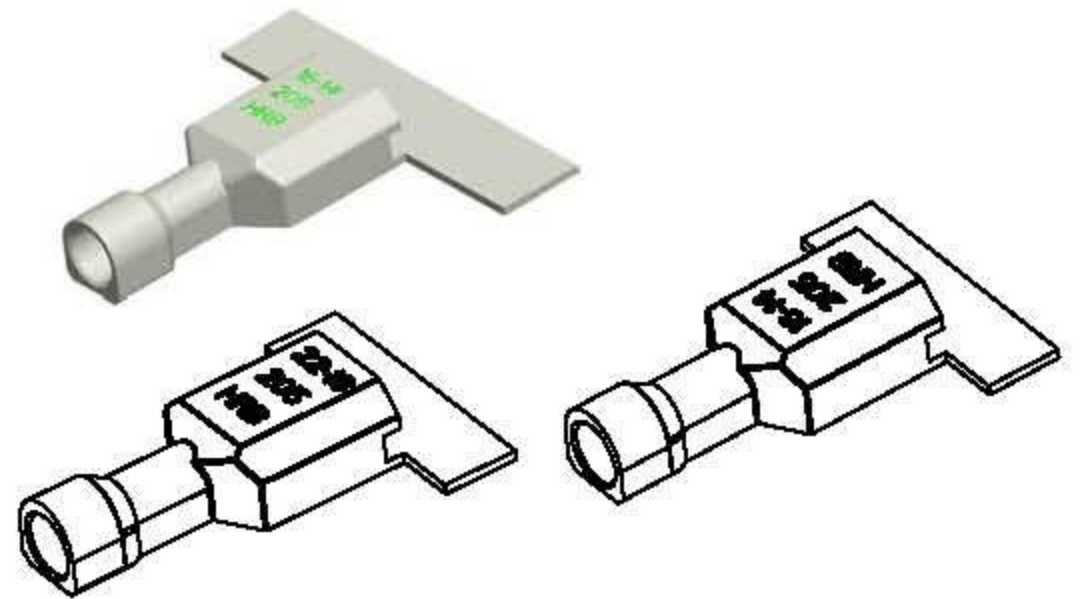

Ordering Information And Dimensions

	Part NO.	A	B	C	D	E	F	G	H	Wire Size	Ins.Dia.max
205#	M6350FN(S)-2(5)-R	0.75	9.75	6.50	21.80	5.30	5.00	28.20	18.85	AWG#22~#18	3.05mm
	M6350FN(S)-2(5)-b	0.75	9.75	6.50	21.80	6.10	5.00	28.20	18.85	AWG#16~#14	4.06mm
	M6350FN(S)-2(8)-R	0.75	9.75	6.50	21.80	5.30	5.00	28.20	18.85	AWG#22~#18	3.05mm
	M6350FN(S)-2(8)-b	0.75	9.75	6.50	21.80	6.10	5.00	28.20	18.85	AWG#16~#14	4.06mm

